




일반규격

모델명	최대작동전압	저항값(Ω)		저항오차
		W	N	
FRW 1W	33V	0.1 ~1K	0.1 ~500	J: $\pm 5\%$ K: $\pm 10\%$ D: $\pm 0.5\%$ F: $\pm 1\%$ G: $\pm 2\%$ H: $\pm 3\%$
FRW 2W	140V	0.1 ~10K	0.1 ~5K	
FRW 3W	170V	0.1 ~10K	0.1 ~5K	
FRW 5W	310V	0.1 ~20K	0.1 ~10K	
FRW 7W	370V	0.1 ~20K	0.1 ~10K	
FRW 10W	700V	0.1 ~50K	0.1 ~25K	
FRW 10W	1020V	0.1 ~70K	0.1 ~35K	


전기적 특성

항목	특성
사용온도	-55°C ~ 200°C
절연저항	20MΩ, DC500V/1Min.
내전압	AC800V/1Min.
온도계수	±260 ppm/°C max

전력저감 곡선

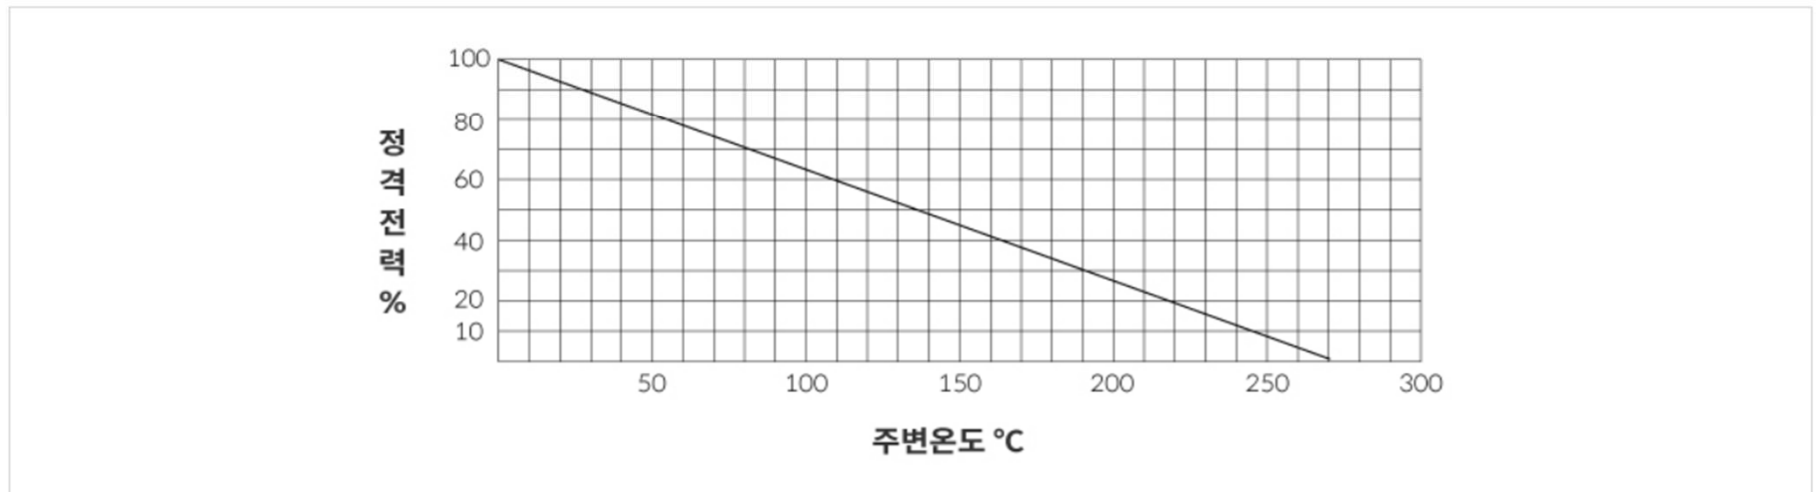

외형치수

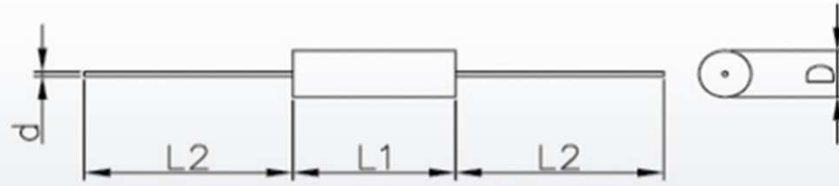


Model	$L1 \pm 1.5$	$L2 \pm 3.0$	$D \pm 1.0$	$d \pm 0.02$
FRW-01	11	30	4	0.8
FRW-02	15	30	5.5	0.8
FRW-03	15	30	5.5	0.8
FRW-05	24	30	8.5	0.8
FRW-07	24	30	8.5	0.8
FRW-10	40	30	8.5	0.8
FRW-15S	51	35	8.5	1
FRW-15L	47	35	10.5	1

주문방법

형명	정격전력	저항값	저항오차
FRW	5W	200	J



외형치수

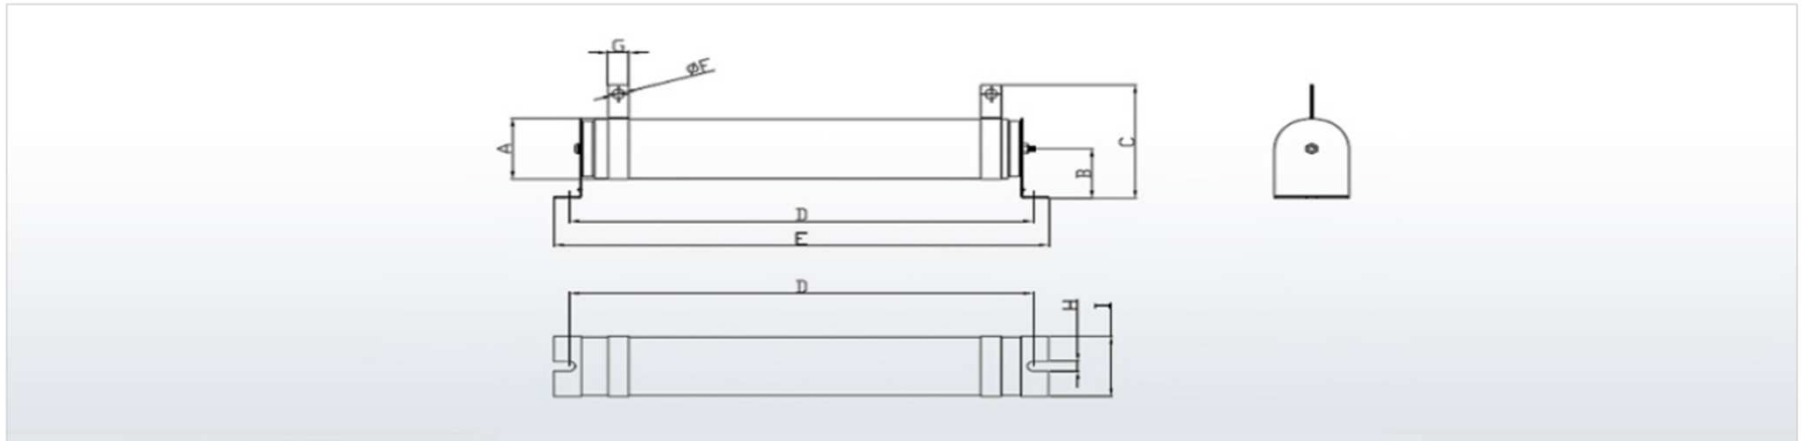

POWER(W)	DIMENSION(mm) ± 2								
	A	B	C	D	E	F	G	H	I
300	42	40	86	300	330	5.5	12	6.5	40
400	42	40	86	380	407	5.5	12	6.5	40
500	52	41	99	345	362	9	15	6.5	54
600	52	41	99	375	392	9	15	6.5	54
700	65	59	126	385	404	10	20	10	65
1000	77	63	130	388	408	10	20	10	75
1200	77	63	130	388	408	10	20	10	75
1500	77	63	130	458	478	10	20	10	75
2000	77	63	130	558	578	10	20	10	75

주문방법

형명	정격전력	저항값	저항오차
WRF	1KW	20Ω	J